



G&P
MACHINERY

STROKE SANDER



STANDARD ACCESSORIES:

Every stroke sander is equipped with a manually operated traveling shoe (top). Also included is a graphite coated mitt (left) and a hand block (right).



OPTIONAL ACCESSORY:

A contact wheel assembly with a matchless contact wheel (above) can be purchased where more aggressive sanding and/or a shorter scratch pattern is desirable.

MODELS

GPMC-6158-5


GPMC-6202-5

GPMC-6264-5

GPMC-6158-5



GPMC-6264-5

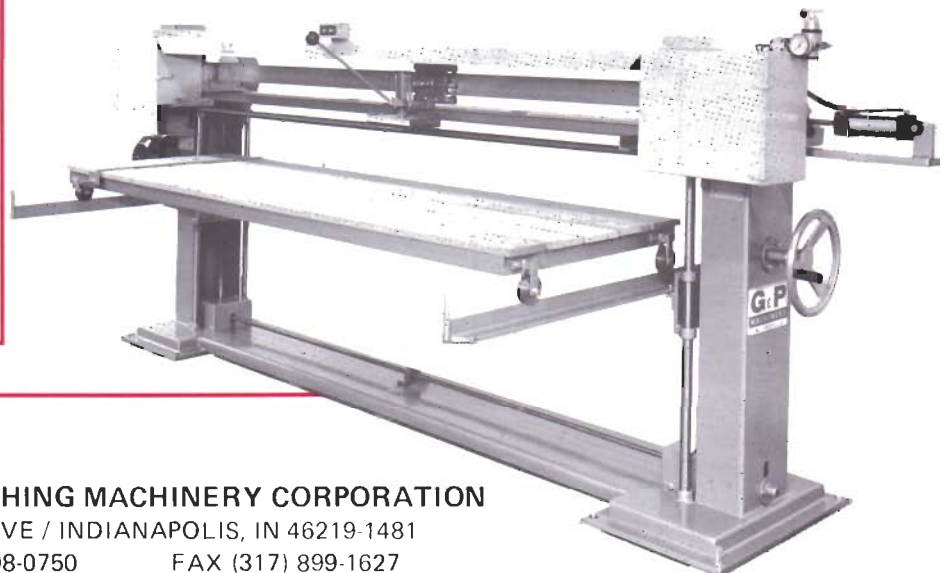

METALWORKING
WOODWORKING
METALWORKING
WOODWORKING
METALWORKING
WOODWORKING

GRINDING & POLISHING MACHINERY CORPORATION

2801 TOBEY DRIVE / INDIANAPOLIS, IN 46219-1481

PHONE (317) 898-0750

FAX (317) 899-1627


STANDARD SPECIFICATIONS

- 5 HP, 1800 RPM, TEFC motor 230-460/3/60 (specify voltage)
- Magnetic push button starter with motor overload protection.
- Air tension for abrasive belt
- Abrasive belt guard with 6" dia. exhaust outlet at drive (motor) end
- 4300 SFPM abrasive belt speed
- Traveling shoe with ball bearing rollers
- Steel frame, wood slat table with ball bearing rollers for in/out motion

OPTIONAL EQUIPMENT

- Electrically powered vertical adjustment for table
- Under table exhaust hood
- 7 1/2 HP motor
- Electronic inverter for variable speed (includes 7 1/2 HP motor)
- Contact wheel assembly for use with matchless or other contact wheel

- For modifications - consult factory

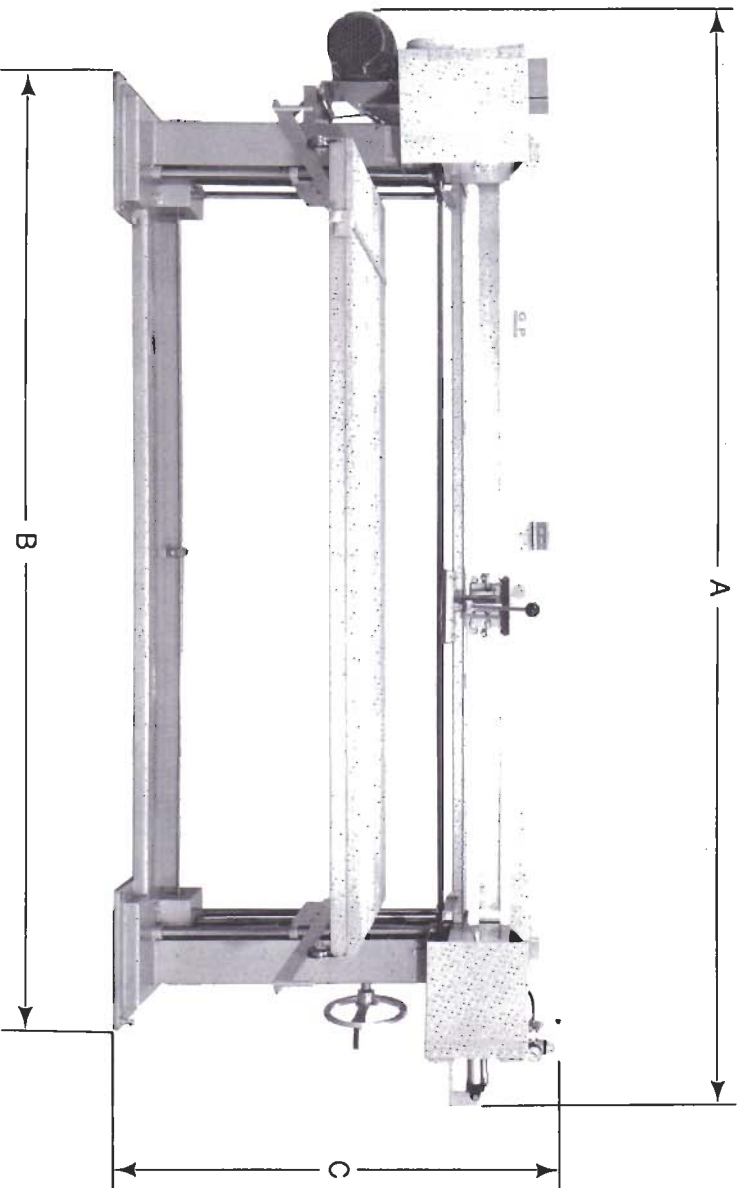

MODEL	A	B	C	DEPTH	BELT SIZE	DRIVE PULLEY	IDLER PULLEY	TABLE SIZE	TABLE TRAVEL	TABLE CAP.	VERT. ADJ.	VERT. ADJ. POWD. LIFT
GP4C-6158-5	101"	74"	54"	58"	6 X 158"	8 X 6	8 X 6	25" X 48"	30	300 LBS.	24"	19"
GP4C-6202-5	121"	95"	55"	61"	6 X 202"	8 X 6	8 X 6	30" X 72"	34	300 LBS.	24"	19"
GP4C-6264-5	155"	125"	55"	62"	6 X 264"	10 X 6	10 X 6	30" X 96"	34	300 LBS.	26"	21"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

NEVER OPERATE ANY SANDING EQUIPMENT WITHOUT PROPER GUARDING. ALWAYS WEAR EYE AND EAR PROTECTION WHEN OPERATING THIS OR ANY SANDING EQUIPMENT.

GRINDING & POLISHING MACHINERY CORPORATION

2801 TOBEY DRIVE / INDIANAPOLIS, IN 46219-1481

PHONE (317) 898-0750

FAX (317) 899-1627

